

STEK® Paint Protection Film

Technical Data Sheet



CHARACTERISTICS

- High-gloss pearl purple finish
- Hydrophobic
- Water stain-resistant
- Self-healing
- Anti-yellowing
- Anti-contamination

APPLICATIONS

For automotive use
(other uses may apply.)

APPLICATION AREAS

Flat surfaces, simple curves,
and compound curves

APPLICATION METHOD

Paint protection films are to be
professionally installed by trained,
authorized installers.

SHELF LIFE

Paint protection films should be
installed within one year from the
date of purchase.

LAYER DESCRIPTIONS

Cap Sheet

Protects film before use

Self-Healing Top Coat

Hydrophobic and scratch-resistant

TPU

High-clarity and impact-resistant

Pearl Purple Color Layer White Layer

Infusion of premium dyes

Pressure-Sensitive Adhesive (PSA)

For easy installation

Release Liner

Protects film before use

LAYER THICKNESS

235 ± 10 µm

PRODUCT DESCRIPTION

Carefully infused with premium dyes, DYNOpurple's vivid violet coloration is accentuated by a lustrous pearl finish. This gorgeous paint protection film transforms any original paint color with a single application—without the need for primers, multiple coats, or harsh chemicals. Our proprietary coating also lends DYNOpurple water stain resistance and hydrophobicity, while its self-healing properties neutralize the issue of small nicks and scratches. With a depth and brilliance unparalleled by any traditional paint job, DYNOpurple offers powerful protection that's never looked better.


STORAGE INSTRUCTIONS

Recommended Temperature Range: 20±2 °C (68±2 °F)

Recommended Relative Humidity: 40-60%

Avoid extreme temperature ranges in storage. Store the product in its original packaging in a horizontal orientation, away from direct sunlight. Do not place heavy objects on top of the packaging, as this may damage the product.

STRUCTURE

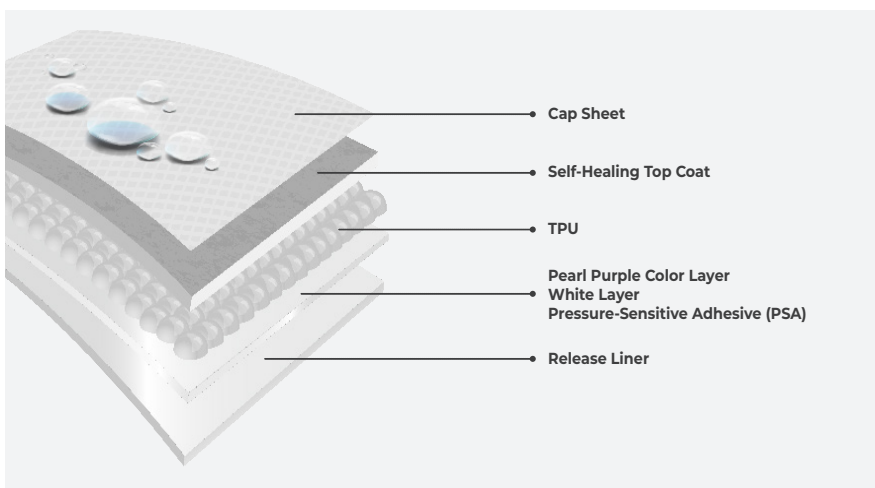

PROPERTIES

Gloss	>88 Gu
Self-Healing	Super
Coating Layer Crack	>40 mm
Adhesion (30 min.)	>1900
Adhesion (24 hrs)	>2400
Hydrophobicity	Water-repellent
Weathering	No change 6500 W Xenon Arc Irradiance: 0.51 W/m ² (340 nm), 65° C Humidity: 50%, R.H. 1000 hrs

STEK® Paint Protection Film

Technical Data Sheet

**PACKAGE
DIMENSIONS**

Box Size
1630 x 185 x 180 (mm)

ROLL CONFIGURATIONS

60 in. x 50 ft (1524 mm x 15 m)

NOTES

All data have been collected by STEK Automotive through internal testing standards and methods. Results may differ when using other testing standards.

Reported values are expected properties and should not be used for product certification.

The provided technical information consists of representative product data and should not be used for specification purposes. Unless otherwise noted, all tests are performed at room temperature.

All concerns regarding warranty and liability are subject to the terms and conditions of sale. When applicable, these terms and conditions are governed by prevailing laws.

Prior to application, the user must determine the suitability of the product for its intended use, and assumes all risk and liability therein.

WARRANTY

10-year limited warranty

Only applicable in the case of proper handling and use. Terms and conditions apply.